
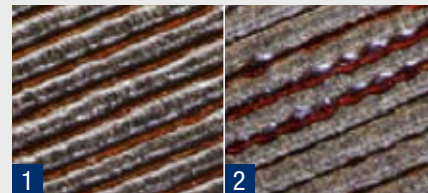


## New bonding varnish PE 75W

Advantages compared to bonding varnish PE 75:

- » No squeezing during bonding
- » No difference between top and bottom side, as both are in condition B
- » Based on water soluble epoxy resin
- » Higher adhesive strength
- » Improved temperature resistance

### Bonding trial

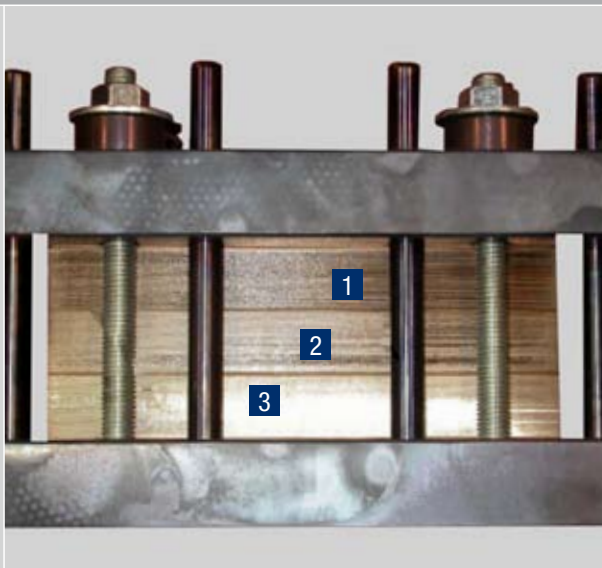

Standard varnish, with squeezing



New varnish, no squeezing

### Other conditions

- » Good behaviour during stamping and laser cutting
- » Can be re-varnished
- » Good corrosion resistance
- » Both sides self bonding (condition B)
- » Insulation thickness approx. 4 µm each side

Further details can be informed by Daniel Dunker (Technical customer service):

Phone: +49(0) 23 31-9 64-2412

E-Mail: [ddunker@cdw.de](mailto:ddunker@cdw.de)